

AS-Interface Safety at Work

ASM




- Safety monitor
- Control Category 4 to EN 954-1
- Monitor for AS-Interface SaW compatible safety device, i.e. safety switches, solenoid interlocks, Emergency-Stop buttons, 2-Hand control, light grid and light curtains
- AS-Interface connection
- One or two redundant pairs of enabling paths
- Additional outputs (transistor, short-circuit proof)
- Configurable functions: AND logical element, OR logical element, Start devices, Start-up test
- Edge-sensitive start push button
- Feedback circuit to monitor external contactors
- LEDs to display switching conditions
- Operating voltage 24 VDC

Technical data

Standards:	EN 50295, EN 61496-1 (1997), IEC/EN 60204-1, EN 954-1, IEC 61508
Control category:	4
Enclosure:	Polyamide PA 66, black
Mounting:	snaps onto standard DIN rail to EN 50022
Screw terminals:	max. 2.5 mm ² (incl. conductor ferrules)
Protection class:	terminals IP 20 enclosure IP 20
U _b :	24 VDC ± 15 %
Residual ripple:	< 15%
I _b :	ASM E1-R2: 0,15 A ASM E2-R2/R2: 0,2 A
Switch-on peak current:	600 mA
AS-Interface operating voltage:	18.5 ... 31.6 V
AS-Interface operating current:	< 45 mA
AS-Interface specification:	Profile - Monitor 7.F
Configuration interface:	RS232: 9600 baud, no parity, 1 start bit, 1 stop bit, 8 data bits
Inputs:	1.Y1, 1.Y2
Input signal:	„Y1, Y2“: I _e < 10 mA at 24 VDC (opto coupler, high-active)
Outputs:	ASM E1-R2: 1.13/14, 1.23/24, 1 enabling path (redundant); ASM E2-R2/R2: 1.13/14, 1.23/24, 2.13/14, 2.23/24, 2 enabling paths (redundant)
Utilisation category:	AC-15, DC-13
I _e /U _e :	3 A / 230 VAC 1 A / 24 VDC
Switching voltage:	max. 230 VAC
I _{the} :	3 A per output circuit
Max. fuse rating:	4 A (slow blow), external
Additional outputs:	transistor outputs, 200 mA total, short-circuit proof-type, positive-switching
Switch-on time:	< 10 s
Response time:	< 40 ms
Indications:	AS-interface: voltage LED green, communication LED red; Enabling paths: LED green, yellow, red conforming to EMC Directive
EMC rating:	III to DIN VDE 0110
Overvoltage category:	III to DIN VDE 0110
Resistance to vibration:	5 ... 55 Hz / amplitude 0.35 mm ± 15 % at the regulation point
Resistance to shock:	10 g / 16 ms
Ambient temperature:	- 20 °C ... + 60 °C
Storage and transport temperature:	- 30 °C ... + 70 °C
Weight:	ASM E1-R2: approx. 350 g; ASM E2-R2/R2: approx. 450 g
Note:	Inductive loads (e.g. contactors, relays, etc.) are to be suppressed by means of a suitable circuit.

Approvals



Ordering details

ASM E ①

No.	Replace	Description
①	1-R2	1 enabling field (redundant)
	2-R2/R2	2 enabling fields (redundant)


Note

The safety monitors ASM E1-R2 and ASM E2-R2/R2 evaluate all transmitted information from each safety device on the AS-Interface network. For the safe guarding of different applications various AS-Interface Safety at Work compatible safety devices are needed, i.e. safety switches, solenoid interlocks, safety sensors, E-stop buttons as well as safe input modules.

The AS-Interface Safety at Work can be used in applications up to control category 4 according to EN 954-1 with the appropriate safety devices and systems.

AS-Interface Safety at Work


Note

- The installation of different safety areas is possible with numerous safety monitors working alongside each other. The maximum number of safety devices including the safety monitors may not exceed 31 participants.
- The allocation of the safety devices to one or more safety monitors is achieved with the help of the configuration software "asimon".
- The wiring diagram shows the safety monitor ASM E2-R2/R2 with start-pushbuttons and feedback loops.
- No safety devices are displayed, because they are installed in the field i.e. on the safety guards itself. The data connection between the safety monitor and the decentralised safety slaves is established via the AS-Interface network.
- For the operation of AS-Interface Safety at Work system, a standard controller, an AS-Interface Master and AS-Interface power supply, must always be used in the application.
- With the RJ 45 connector the safety monitor is configured and started up.
- Start push button 

A start push button (NO) can optionally be connected to the ASM. With the guard door(s) closed, the enabling paths are then not closed until the start push button has been operated. If neither start button nor feedback circuit are required, then no connections are required to the terminals (1Y1/2, 2Y1/2).
- Output expander module

For additional contacts by means of more enabling paths and potential-free indication contacts an output expander module is connected to the safety monitor, i.e. to the internal ASM enabling path. For the control of the additional outputs the ASM feedback loop is utilised.

Wiring diagram

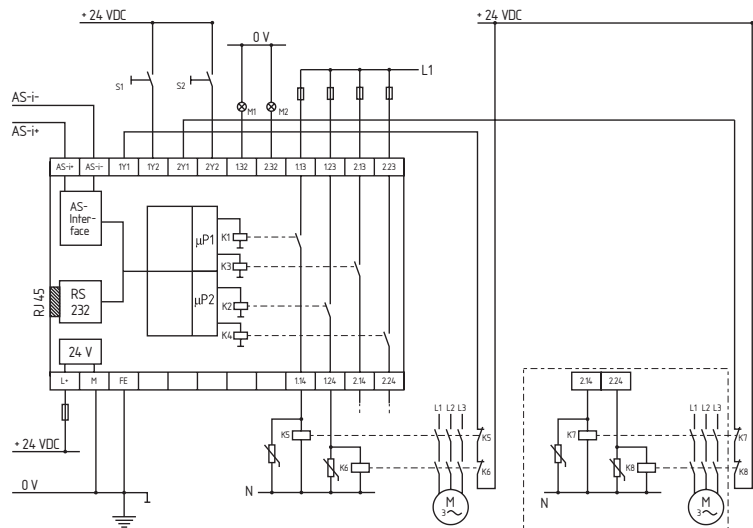

AS-Interface Safety at Work

asimon version 2.0



The software asimon is a tool for the configuration and commissioning of the AS-Interface safety monitors.

The configuration of the safety monitor and its safety devices, i.e. E-Stop buttons, solenoid - interlocks, safety switches, 2-Hand controls, light curtains etc. is performed by an easy-to-use graphical interface. Thus providing safeguarding of hazardous areas present by power-driven machinery.

The asimon offers the user a library of icons representing different safety devices and other functional devices, i.e. one or two independent enabling paths, automatic or monitored start, stop category 0 or 1 etc. For the implementation of a new safety application the required safety devices are selected from the icon library, parameterised and assigned to the respective enabling path.

System components

Following the successful configuration and download, the safety monitor and the safety devices can be tested and monitored with asimon.

The following functions are available with the asimon software:

- Configuration of different safety devices
- Configuration of start-modules
- Configuration logical combinations (AND, OR, RS Flip-Flops)
- Configuration of the feedback loops
- Configuration of the operating methods
- Configuration of the system-modules
- Print out of Configuration protocol

Asimon can be used offline as well as online during development and project planning. The configuration files can be saved and loaded as desired.

The software is compatible with the Microsoft® operating system Windows 95/98/ME/NT/2000/XP.

- Download cable: Interface cable with two RJ 45 connectors, Length: 0.10 m Part-number: ASM-DC1
- Configuration cable: Interface cable with one RJ 45 and SUBD 9 connector, Length: 1.2 m Part-number: ASM-KC1

Approvals



Ordering details

SET ASM-SWP ASM-startup-package:
Configuration and diagnostic software package with online documentation on CD-ROM, a configuration- and downloadcable

ASM-CD asimon software package:
Configuration and diagnostic software package with online documentation on CD-ROM

Note

- Hardware requirements:**
- 200 MHz INTEL Pentium® or AMD® Processor or quicker
 - Min. 8 Mbyte free main memory (RAM)
 - Min. 8 Mbyte free hard disk memory
 - A CD-ROM drive (or 3 1/2 " disc drive) for the installation
 - A mouse
 - A free serial interface with 9 SubD-connection


- Software requirements:**
- Microsoft Windows ® 95/98/ME/NT/2000/XP

Ordering details

Download cable **ASM-DC1**
Configuration cable **ASM-KC1**

AS-Interface Safety at Work

AZ 16 AS

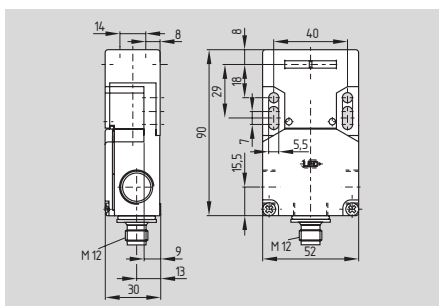

- Safety switch with separate actuator
- Integrated AS-Interface interface
- AS-Interface LED status display
- AS-Interface M12 connector
- Address jack (optional)
- Thermoplastic enclosure
- Coded actuator
- Long life
- Protection class IP 67

Technical data

Standards: EN 50295
EN 60947-5-1
EN 954-1

Enclosure: glass-fibre reinforced thermoplastic, self-extinguishing

AS-Interface connection type: connector M12 x 1

Protection class: IP 67

AS-Interface operating voltage: 26.5 ... 31.6 VDC, via AS-interface, reverse-polarity proof

AS-Interface operating current: ≤ 50 mA

AS-Interface specification:

Profile	S-0.B
IO-Code:	0x0
ID-Code:	0xB
ID-Code2:	0xE

Inputs:

Contact	Status	Data bits
1	on	D0/D1 = dynamic code transmission
1	off	D0/D1 = static code "00"
2	on	D2/D3 = dynamic code transmission
2	off	D2/D3 = static code "00"

Parameter bits: P0 ... P3 not used

Input module address: default on address 0, programmable via the AS-Interface Master or Hand-held programming device

Indications:

AS-interface: voltage LED green, communication LED red

Enabling status: LED yellow


Mechanical life: > 1 million operations

EMC rating: conforming to EMC Directive


Ambient temperature: -25 °C ... + 60 °C

Storage and transport temperature: -25 °C ... + 85 °C


System components

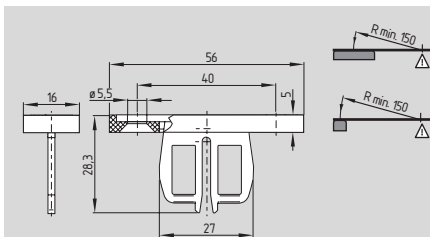

Straight actuator AZ 15/16-B1

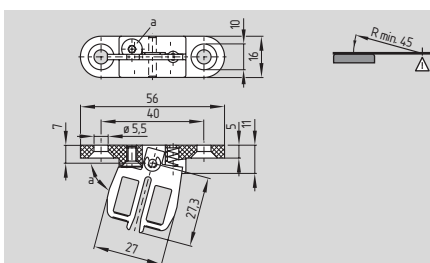

Flexible actuator AZ 15/16-B2

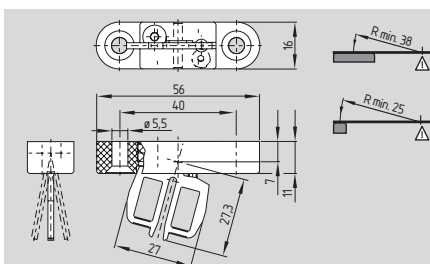

Flexible actuator AZ 15/16-B6

Approvals



Ordering details

AZ 16^①-AS^{②③}

No.	Replace	Description
①	ST1	Connector (middle)
	ST2	Connector (right)
	ST3	Connector (left)
②	r	No latching
	r-2254	Latching 30 N
③		No address jack
	b	Address jack

Note



M12 connector:

- 1: AS-Interface +
- 2: spare
- 3: AS-Interface -
- 4: spare

Ordering details


Straight actuator	AZ 15/16-B1
Flexible actuator	AZ 15/16-B2
Flexible actuator	AZ 15/16-B6

Further actuators can be found in the chapter „Safety switches with separate actuator“, see page 1-9.

Actuators must be ordered separately.

AS-Interface Safety at Work

AZM 161 AS

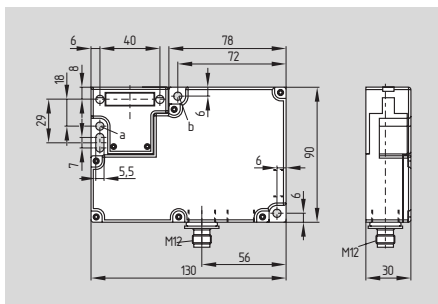

- Solenoid interlock
- Integrated AS-Interface interface
- AS-Interface LED status display
- AS-Interface M12 connector
- Magnetic drive through AS-Interface output
- Solenoid power supply via the AS-Interface network or via an external 24 VDC power supply (p version)
- Address jack (optional)
- Thermoplastic enclosure
- Manual release, emergency exit or emergency release
- High holding force 2000 N
- 30 N latching force (optional)
- Power to unlock / power to lock principle
- Actuating play 5.5 mm in direction of actuation
- Protection class IP 67

Technical data

Standards: EN 50295
EN 60947-5-1
EN 954-1

Enclosure: glass-fibre reinforced thermoplastic, self-extinguishing

AS-Interface connection type: connector M12 x 1

Protection class: IP 67

AS-Interface operating voltage: 26.5 ... 31.6 VDC, via AS-interface, reverse-polarity proof

AS-Interface operating current: Total: ≤ 500 mA
AS electronics: ≤ 50 mA

AS-Interface specification:

Profile	S-7.B
IO-Code	0x7
ID-Code	0xB
ID-Code2	0xE

Inputs:

Contact	Status	Data bits
1	on	D0/D1 = dynamic code transmission
1	off	D0/D1 = static code "00"
2	on	D2/D3 = dynamic code transmission
2	off	D2/D3 = static code "00"

Outputs: A0 Solenoid control
A1 ... A3 not used

Parameter bits: P0 Actuator / interlock status
P1 ... P3 not used

Input module address: default on address 0, programmable via the AS-interface Master or Hand-held programming device

Indications:
AS-interface: voltage LED green, communication LED red

Enabling status: LED yellow

Mechanical life: > 1 million operations

F_{max}: 2000 N

EMC rating: conforming to EMC Directive

Ambient temperature: -25 °C ... +60 °C

Storage and transport temperature: -25 °C ... +85 °C

Note

The AZM 161 Z version must be selected for applications where safety guard locking is required. The AZM 161 B version has a safety-monitored actuator with supplementary guard locking function.

Depending on the device version, the safety inputs (D0-D3) are connected internally to the solenoid (Z) or actuator contacts (B). The safety monitor (ASM) monitors the coded data transmission.

Output A0 is used to lock or unlock the solenoid of the solenoid interlock. Parameter bit P0 gives the control system feedback about the status of the actuator or solenoid interlock.

Parameter bit:

The status of the actuator or the locking bolt can be monitored by the parameter bit P0 depending on the device:

Device	Parameter bit P0	Safety guard status
AZM 161 B	0	Guard locked
AZM 161 B	1	Guard unlocked
AZM 161 Z	0	Guard closed
AZM 161 Z	1	Guard open

Approvals only without address jack



Ordering details

AZM 161①②-AS③④⑤⑥⑦

No.	Replace	Description
①	B	Actuator monitored
	Z	Guard locking monitored
②	ST1	Connector (middle)
	ST2	Connector (right)
③		No latching
	r	Latching 30 N
④		Power to unlock
	a	Power to lock
⑤		No address jack
	b	Address jack

No.	Replace	Description
⑥		Integrated solenoid supply
	p	External solenoid supply
⑦		Manual release
	N	Emergency release
	T	Emergency exit

Note



M12 connector:


- 1: AS-Interface +
- 2: Aux - (p)
- 3: AS-Interface -
- 4: Aux + (p)

AS-Interface Safety at Work


Contact variants

Integrated power supply


Power to unlock Guard locking monitored




Actuator monitored



Power to lock Guard locking monitored




Actuator monitored




Contact variants

External power supply


Power to unlock Guard locking monitored




Actuator monitored



Power to lock Guard locking monitored



Actuator monitored



Note

Integrated power supply:

The solenoid interlock AZM 161 AS is powered by the AS-Interface. Connection to the AS-Interface is made via the M12 connector.

The required supply voltage for the solenoid is also supplied by the AS network.

The maximum number of interlocks with integrated power supply and power to lock principle (a) depends solely on the employed AS-Interface power supply and its electric current output.

To lock or unlock the guard door, the network must supply a maximum current of 0.5 A per solenoid interlock.

External power supply:

The Solenoid interlock AZM 161 AS ...p is monitored by the AS-Interface. The locking solenoid is powered by an external power supply. Connection to the AS-Interface and the auxiliary power is made via a single M12 connector.

The necessary solenoid supply voltage is provided externally (auxiliary power).

Up to 29 solenoid interlocks with an external power supply can be operated on one AS-Interface network depending on the application.

Solenoid control:


An internal output controls the solenoid operation. Depending on the device version, the output bit A0 locks or releases the actuator. The output bit A0 has the same address as the safety inputs.

Legend

- D0 – D3 Coded data for the evaluation of the safety monitor (4 Bit)
- P0 Status signal (1 Bit)
- A0 Output for switching the solenoid (1 Bit)

AS-Interface Safety at Work

ZS 71 AS

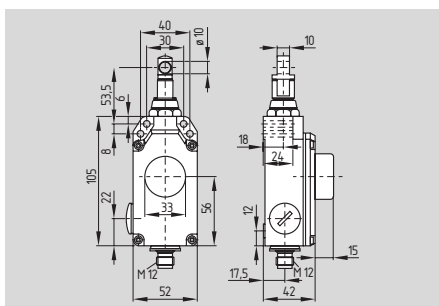

- Pull-wire Emergency-Stop switch
- Integrated AS-Interface interface
- AS-Interface LED status display
- AS-Interface M12 connector
- Metal enclosure
- Various spring force variants (actuating forces)
- Adjustable actuating force
- Wire up to 20 m long
- Reset by push button or key possible
- Protection class IP 65 (with push button and external watertight collar)

Approvals



Ordering details

ZS 71①-AS ②③-④-⑤ / ⑥

No.	Replace	Description
①	ST1	Connector
②		Without watertight collar
	W	With watertight collar
③		Without safety function
	VD	Push button reset
	VS	Key reset
④		Without position indicator
	A	With position indicator
⑤		Without indicator lamp
	G	With indicator lamp
⑥	55 N	Pre-tensioning force: For wire length 0 - 5 m
	200 N	For wire length 5 - 20 m

Technical data

Standards: EN 50295, EN 60947-5-1, EN 954-1

Enclosure: cast aluminium, enamelled

Cover: thermoplastic ultramid

AS-Interface connection type: connector M12 x 1

Protection class: IP 54

IP 65 for version with

push button reset

and watertight collar

AS-Interface operating voltage: 26.5 ... 31.6 VDC,

via AS-interface,

reverse-polarity proof

AS-Interface operating current: ≤ 50 mA,

with indicator lamp ≤ 130 mA

AS-Interface specification: Profile S-0.B

(with indicator lamp) S-7.B

IO-Code 0x0

(with indicator lamp) 0x7

ID-Code 0xB

ID-Code2 0xE

Inputs:

Contact Status Data bits

1 on D0/D1 = dynamic code

transmission

1 off D0/D1 = static code "00"

2 on D2/D3 = dynamic code

transmission

2 off D2/D3 = static code "00"

Outputs: A0 Indicator lamp (optional)

A1 ... A3 not used

Parameter bits: P0 ... P3 not used

Input module address: default on address 0,

programmable via the

AS-interface Master or

Hand-held programming device

Indications: AS-interface: voltage LED green,

communication LED red

Enabling status: LED yellow

Mechanical life: > 1 million operations

Maximum cable length: 20 m

Features: wire pull and

breakage detection

EMC rating: conforming to

EMC Directive

Ambient temperature: - 25 °C ... + 60 °C

Storage and transport

temperature: - 25 °C ... + 85 °C

Note

A separate address jack is not available as an

option. The addressing must take place via the

cable end or the M12 connector.



M12 connector:

1: AS-Interface +

2: spare

3: AS-Interface -


4: spare

A wide range of accessories is available.

For selection, see page 2-11.

AS-Interface Safety at Work

ZS 73 AS

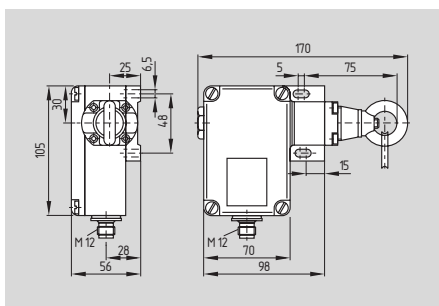

- Pull-wire Emergency-Stop switch
- Integrated AS-Interface interface
- AS-Interface LED status display
- AS-Interface M12 connector
- Metal enclosure
- 4 various spring force variants (actuating forces)
- Adjustable actuating force
- Wire up to 50 m long
- Reset by push button or key possible
- Protection class IP 65 (with push button and external watertight collar)

Technical data

Standards: EN 50295, EN 60947-5-1, EN 954-1
 Enclosure: cast aluminium, enamelled
 Cover: thermoplastic ultramid

AS-Interface connection type: connector M12 x 1
 Protection class: IP 54

IP 65 for version with push button reset and watertight collar

AS-Interface operating voltage: 26.5 ... 31.6 VDC, via AS-interface, reverse-polarity proof

AS-Interface operating current: ≤ 50 mA, with indicator lamp ≤ 130 mA

AS-Interface specification:

Profile	S-0.B
(with indicator lamp)	S-7.B
IO-Code	0x0
(with indicator lamp)	0x7
ID-Code	0xB
ID-Code2	0xE

Inputs:

Contact	Status	Data bits
1	on	D0/D1 = dynamic code transmission
1	off	D0/D1 = static code "00"
2	on	D2/D3 = dynamic code transmission
2	off	D2/D3 = static code "00"

Outputs: A0 Indicator lamp (optional)
 A1 ... A3 not used

Parameter bits: P0 ... P3 not used
 Input module address: default on address 0, programmable via the AS-interface Master or Hand-held programming device

Indications: AS-interface: voltage LED green, communication LED red
 Enabling status: LED yellow

Mechanical life: > 1 million operations
 Maximum cable length: 50 m

Features: wire pull and breakage detection

EMC rating: conforming to EMC Directive

Ambient temperature: -25 °C ... +60 °C
 Storage and transport temperature: -25 °C ... +85 °C

Approvals



Ordering details

ZS 731-AS ②③-4 / ⑤

No.	Replace	Description
①	ST1	Connector
②	W	Without watertight collar
③	VD	With watertight collar
	VS	Without safety function
		Push button reset
		Key reset
④	G	Without indicator lamp
		With indicator lamp
⑤	80-100N	Pre-tensioning force:
		For wire length 0-10 m
	120-180N	For wire length 10-20 m
	195-275N	For wire length 20-30 m
	295-390N	For wire length 30-50 m

Note

A separate address jack is not available as an option. The addressing must take place via the cable end or the M12 connector.




M12 connector:

- 1: AS-Interface +
- 2: spare
- 3: AS-Interface -
- 4: spare

A wide range of accessories is available. For selection, see page 2-11.

AS-Interface Safety at Work

ZS 75 AS

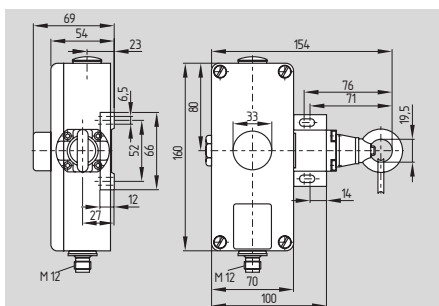

- Pull-wire Emergency-Stop switch
- Integrated AS-Interface interface
- AS-Interface LED status display
- AS-Interface M12 connector
- Metal enclosure
- 4 various spring force variants (actuating forces)
- Adjustable actuating force
- Wire up to 50 m long
- Reset by push button or key possible
- Protection class IP 65 (with push button and external watertight collar)

Approvals



Ordering details

ZS 751-AS ②③-④ / ⑤

No.	Replace	Description
①	ST1	Connector
②	W	Without watertight collar
③	VD	With watertight collar
	VS	Without safety function
		Push button reset
		Key reset
④	G	Without indicator lamp
		With indicator lamp
⑤	80-100N	Pre-tensioning force:
		For wire length 0-10 m
	120-180N	For wire length 10-20 m
	195-275N	For wire length 20-30 m
	295-390N	For wire length 30-50 m

Technical data

Standards: EN 50295, EN 60947-5-1, EN 954-1

Enclosure: cast aluminium, enamelled

Cover: cast aluminium, enamel finish

AS-Interface connection type: connector M12 x 1

Protection class: IP 54

IP 65 for version with

push button reset

and watertight collar

AS-Interface operating voltage: 26.5 ... 31.6 VDC,

via AS-interface,

reverse-polarity proof

AS-Interface operating current: ≤ 50 mA,

with indicator lamp ≤ 130 mA

AS-Interface specification: Profile S-0.B

(with indicator lamp) S-7.B

IO-Code 0x0

(with indicator lamp) 0x7

ID-Code 0xB

ID-Code2 0xE

Inputs:

Contact	Status	Data bits
1	on	D0/D1 = dynamic code transmission
1	off	D0/D1 = static code "00"
2	on	D2/D3 = dynamic code transmission
2	off	D2/D3 = static code "00"

Outputs: A0 Indicator lamp (optional)

A1 ... A3 not used

Parameter bits: P0 ... P3 not used

Input module address: default on address 0,

programmable via the

AS-interface Master or

Hand-held programming device

Indications: AS-interface: voltage LED green,

communication LED red

Enabling status: LED yellow

Mechanical life: > 1 million operations

Maximum cable length: 50 m

Features: wire pull and

breakage detection

EMC rating: conforming to

EMC Directive

Ambient temperature: - 25 °C ... + 60 °C

Storage and transport

temperature: - 25 °C ... + 85 °C

Note

A separate address jack is not available as an option. The addressing must take place via the cable end or the M12 connector.



M12 connector:

1: AS-Interface +

2: spare

3: AS-Interface -


4: spare

A wide range of accessories is available.

For selection, see page 2-11.

AS-Interface Safety at Work

NAS 311 AS

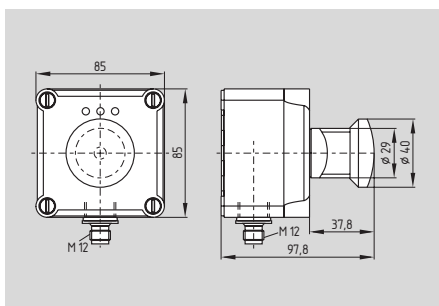

- E-STOP station
- Integrated AS-Interface interface
- AS-Interface LED status display
- AS-Interface M12 connector
- Thermoplastic or metal actuators and enclosures
- Pull to reset
- Resistant to chemicals
- Protection class IP 65

Technical data

Standards: EN 50295, EN 60947-5-1, EN 954-1

Enclosure: glass-fibre reinforced polyamide nylon, self-extinguishing; metal enclosure, paint finish

Emergency-Stop button: thermoplastic or aluminium

AS-Interface connection type: connector M12 x 1

Protection class: IP 65

AS-Interface operating voltage: 26.5 ... 31.6 VDC, via AS-interface, reverse-polarity proof

AS-Interface operating current: ≤ 50 mA

AS-Interface specification:

Profile	S-0.B
IO-Code:	0x0
ID-Code:	0xB
ID-Code2:	0xE

Inputs:

Contact	Status	Data bits
1	on	D0/D1 = dynamic code transmission
1	off	D0/D1 = static code "00"
2	on	D2/D3 = dynamic code transmission
2	off	D2/D3 = static code "00"

Parameter bits: P0 ... P3 not used

Input module address: default on address 0, programmable via the AS-interface Master or Hand-held programming device

Indications: AS-interface: voltage LED green, communication LED red

Enabling status: LED yellow

EMC rating: conforming to EMC Directive

Ambient temperature: -25 °C ... $+60$ °C

Storage and transport temperature: -25 °C ... $+85$ °C

Approvals



Ordering details

NAS 311 ①-AS ②

No.	Replace	Description
①	ST1	Connector
②	M	Thermoplastic enclosure
	MH	Metal enclosure and push button with protection collar

Note

A separate address jack is not available as an option. The addressing must take place via the cable end or the M12 connector.




M12 connector:

- 1: AS-Interface +
- 2: spare
- 3: AS-Interface -
- 4: spare


AS-Interface Safety at Work

AST ... ST-AS

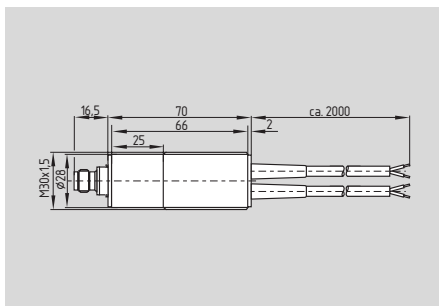

- Input module with M12 connector
- 2 safe inputs for mechanical contacts
- Cross-wire monitoring
- Magnetic drive through AS-Interface output
- Solenoid power supply via an external 24 VDC power supply
- AS-Interface LED status display
- AS-Interface M12 connector
- Thermoplastic enclosure
- Long life
- Protection class IP 67
- Connection of NC/NC contact or NC/NO contact combination

AST ... L-AS

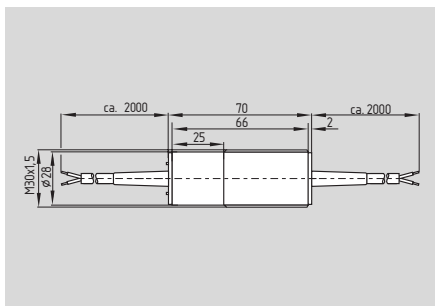

- Input module with cable, length 2 m

Technical data

Standards: EN 50295, EN 60947-5-1, EN 954-1
 Enclosure: glass-fibre reinforced thermoplastic, self-extinguishing

AS-Interface connection type: (see ordering data)
 Protection class: IP 67
 AS-Interface operating voltage: 26.5 ... 31.6 VDC, via AS-interface, reverse-polarity proof

AS-Interface operating current: ≤ 50 mA

AS-Interface specification:

Profile	S-7.B
IO-Code	0x7
ID-Code	0xB
ID-Code1	0xF
ID-Code2	0xE

Inputs:

Contact	Status	Data bits
1	on	D0/D1 = dynamic code transmission
1	off	D0/D1 = static code "00"
2	on	D2/D3 = dynamic code transmission
2	off	D2/D3 = static code "00"

Outputs: A0 Solenoid control
 A1... A3 not used

Parameter bits: P0 ... P3 not used
 Input module address: default on address 0, programmable via the AS-interface Master or Hand-held programming device

Indications: AS-Interface: supply voltage green LED, communication red LED, blinking = cross-wire short
 Enabling status: LED1/contact1, yellow/contact2

EMC rating: conforming to EMC Directive

Ambient temperature: - 25 °C ... + 55 °C

Storage and transport temperature: - 25 °C ... + 85 °C

Approvals



Ordering details

AST ①②-AS③④

No.	Replace	Description
①	02	1 NC/1 NC
	11	1 NO/1 NC
	②	M12 connector
③	L	Cable (2m)
	2	2 x 2-single conductors (2 safety inputs)
	4	1 x 4-single conductors (2 safety inputs)
	6	1 x 6-single conductors (2 safety inputs and 1 semiconductor output)
④	ST	M12 connector with 2m cable (2 x 2-single conductors or 1 x 4-single conductors) (optionally)

Note



M12 connector:

- 1: AS-i +
- 2: Aux - (6) (AST...6)
- 3: AS-i -
- 4: Aux + (6) (AST...6)


AS-Interface Safety at Work

Note

- The wiring diagram is shown with guard doors closed and in de-energised condition.


Wiring diagram

- Monitoring a sliding guard door using two position switches with safety function. The NC contact must have positive break when the guard door is opened.

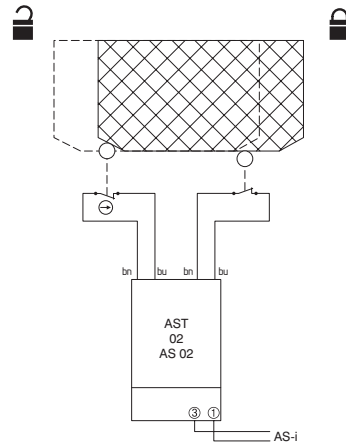


- The module AST...AS is monitored by the AS-Interface. The locking solenoid is powered by an external power supply. Connection to the AS-Interface and the auxiliary power is made via a single M12 connector or via a 4-pole connecting cable.
- The necessary solenoid supply voltage is provided externally (auxiliary power).

- An internal output controls the solenoid operation. Depending on the interlocking device, output bit A0 locks or unlocks the actuator. Output bit A0 has the same address as the safety inputs.

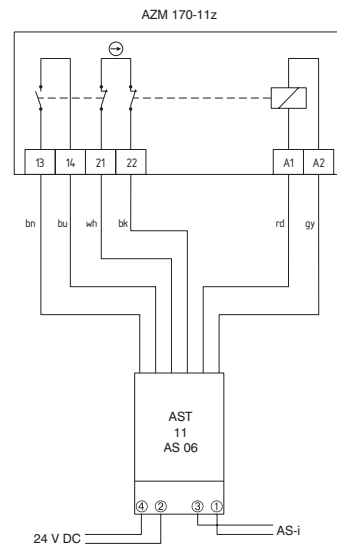

AS-Interface Safety at Work

BNS 16 AS

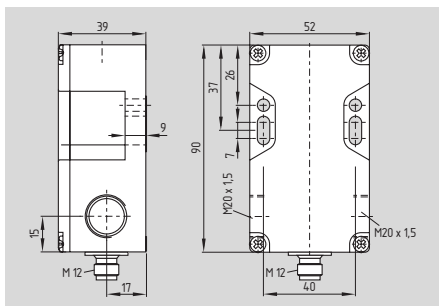

- Safety sensor
- Integrated AS-Interface interface
- AS-Interface LED status display
- Available with M12 plug-in connector and pre-wired cable
- Thermoplastic enclosure
- Coded actuator
- Long life, no mechanical wear
- Intensive to transverse misalignment
- Concealed mounting possible
- Intensive to soiling
- Protection class IP 67

Technical data

Standards: EN 50295
EN 60947-5-1
EN 954-1

Enclosure: glass-fibre reinforced thermoplastic, self-extinguishing

AS-Interface connection type: connector M12 x 1

Protection class: IP 67

AS-Interface operating voltage: 26.5 ... 31.6 VDC, via AS-interface, reverse-polarity proof

AS-Interface operating current: ≤ 100 mA

AS-Interface specification:

Profile: S-0.B
IO-Code: 0x0
ID-Code: 0xB
ID-Code2: 0xE

Inputs:

Contact	Status	Data bits
1	on	D0/D1 = dynamic code transmission
1	off	D0/D1 = static code "00"
2	on	D2/D3 = dynamic code transmission
2	off	D2/D3 = static code "00"

Parameter bits: P0 ... P3 not used

Input module address: Default on address 0

Indications:

AS-interface: voltage LED green, communication LED red

Enabling status: LED yellow

Mode of operation: magnetic

Sao: 8 mm

Sar: 18 mm

Repeat accuracy R: $\leq 0,1 \times S_{a0}$

Switching frequency f: < 1 Hz


Actuating magnet: BPS 16, coded

EMC rating: conforming to EMC Directive


Ambient temperature: -25 °C ... $+60$ °C

Storage and transport temperature: -25 °C ... $+85$ °C

System components

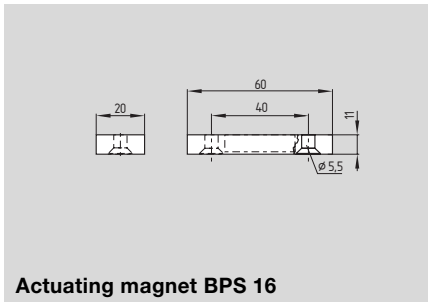

Actuating magnet BPS 16

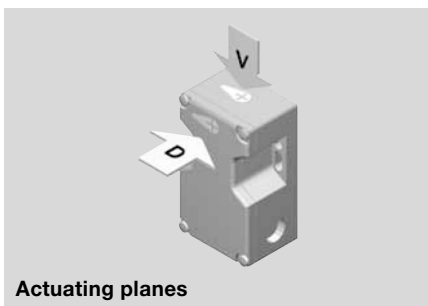

Actuating planes

Approvals



Ordering details

BNS 16①-AS②

No.	Replace	Description
①	ST1	Connector (middle)
	ST2	Connector (right)
	ST3	Connector (left)
②	V	Actuating planes: front side
	D	cover-side

Note



M12 connector:

- 1: AS-Interface +
- 2: spare
- 3: AS-Interface -
- 4: spare

Ordering details

Actuating magnet **BPS 16**

Actuators must be ordered separately.

AS-Interface Safety at Work


System components



IDC connector (M12 outlet)




IDC connector (screw outlet)



Terminal mounting H 30

System components

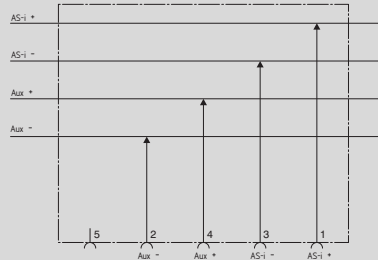

Passive connection module (M12 outlet)

Ordering details


IDC connector (M12 outlet)
IDC connector pre-wired (screw outlet)
Terminal mounting H 30

Ordering details

Passive connection module
(M12 outlet) **on request**

AS-Interface Safety at Work

BNS-B20 AS

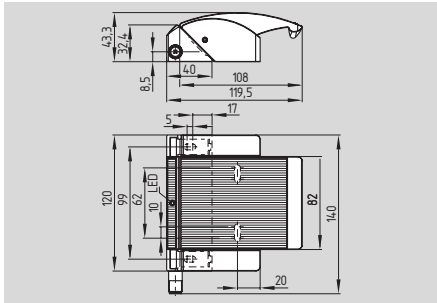

- Non-contact safety switch
- No protruding actuator, no risk of injury
- Does not protrude into the door opening
- Substitutes door-handle and safety switch, no further door fittings required
- Modern and symmetric design
- Fitted with four screws only
- Latching force of approx. 100 N
- Plug-in connector
- Tamper-proof because of integral coded safety sensor
- LED indication
- Ergonomic operation
- Suitable for hinged and sliding guards
- Up to control category 4 to EN 954-1
- Up to PDF-M to IEC 60947-5-3

Approvals



Ordering details

BNS-B20-AS-ST-① Sensor
BNS-B20-B01 Actuator

No.	Replace	Description
-----	---------	-------------

①	L	Door hinge on left-hand side
	R	Door hinge on right-hand side

Technical data

Standards: EN 50295, EN 60947-5-1, EN 954-1
 Enclosure: glass-fibre reinforced thermoplastic
 Protection class: IP 67 to EN 60529
 Connection: connector M 12 x 1, eight pole
 Mode of operation: magnetic
 Control category: up to 4 to EN 954-1 in combination with a safety monitoring module
 Classification: up to PDF-M to IEC 60947-5-3 in combination with a safety monitoring module

S_{ao} : 0 mm
 S_{ar} : 22 mm
 Switching conditions indicator: LED; illuminated when guard is closed
 Max. switching voltage with LED: 24 VDC
 Max. switching current with LED: 10 mA
 Max. switching capacity with LED: 240 mW
 Ambient temperature: $-25\text{ }^{\circ}\text{C} \dots +70\text{ }^{\circ}\text{C}$
 Storage / transport temp.: $-25\text{ }^{\circ}\text{C} \dots +70\text{ }^{\circ}\text{C}$
 Switching frequency f : $< 1\text{ Hz}$
 Resistance to shock: 30 g / 11 ms
 Resistance to vibration: 10 ... 55 Hz, amplitude 1 mm
 Max. door weight: hinged guard: 5 kg, sliding guard: 3 kg

AS-Interface

operating voltage: 26.5 ... 31.6 VDC, via AS-Interface, reverse-polarity proof
 operating current: $\leq 50\text{ mA}$
 specification: Profile: S-0.B
 IO-Code: 0x0
 ID-Code: 0xB
 ID-Code2: 0xE

Inputs:

Contact	Status	Data bits
1	on	D0/D1 = dynamic code transmission
1	off	D0/D1 = static code "00"
2	on	D2/D3 = dynamic code transmission
2	off	D2/D3 = static code "00"


Input module address: Default on address 0

Indications: AS-interface: voltage LED green, communication LED red
 Enabling status: LED yellow

Note

Inductive loads (e.g. contactors, relays, etc.) are to be suppressed by means of a suitable circuit.


A separate address jack is not available as an option. The addressing must take place via the M12 connector 4-pole.



1: AS-i +
 2: spare
 3: AS-i -
 4: spare

AS-Interface Safety at Work

BNS 33 AS

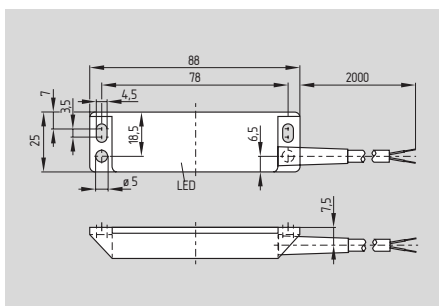

- Safety sensor
- Integrated AS-Interface interface
- AS-Interface LED status display
- Available with M12 plug-in connector and pre-wired cable
- Thermoplastic enclosure
- Coded actuator
- Long life, no mechanical wear
- Intensive to transverse misalignment
- Concealed mounting possible
- Intensive to soiling
- Protection class IP 67

Technical data

Standards: EN 50295
EN 60947-5-1
EN 954-1

Enclosure: glass-fibre reinforced thermoplastic

AS-Interface connection type: cable LSYY (black)

Cable section: 2 x 0.24 mm²

Protection class: IP 67

AS-Interface operating voltage: 26.5 ... 31.6 VDC, via AS-interface, reverse-polarity proof

AS-Interface operating current: ≤ 50 mA

AS-Interface specification:

Profile: S-0.B

IO-Code: 0x0

ID-Code: 0xB

ID-Code2: 0xE

Inputs:

Contact	Status	Data bits
1	on	D0/D1 = dynamic code transmission
1	off	D0/D1 = static code "00"
2	on	D2/D3 = dynamic code transmission
2	off	D2/D3 = static code "00"

Parameter bits: P0 ... P3 not used

Input module address: default on address 0, programmable via the AS-interface Master or Hand-held programming device

Indications: AS-interface: voltage LED green, communication LED red

Enabling status: LED yellow

Mode of operation: magnetic

S_{ao}: 5 mm

S_{ar}: 15 mm


Actuating magnet: BPS 33, coded

EMC rating: conforming to EMC Directive


Ambient temperature: -25 °C ... +70 °C

Storage and transport temperature: -25 °C ... +85 °C

System components

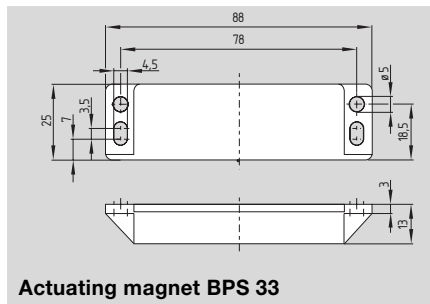

Actuating magnet BPS 33

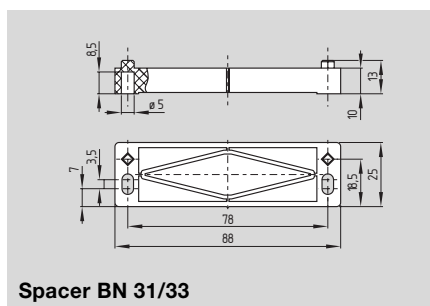

Spacer BN 31/33

Approvals



Ordering details

BNS 33①-AS

No.	Replace	Description
①	STG	2 m cable
	STW	2 m cable with straight plug M12
		2 m cable with angled plug M12

Note

A separate address jack is not available as an option. The addressing must take place via the cable end or the M12 connector.



M12 connector:


- 1: AS-Interface +
- 2: spare
- 3: AS-Interface -
- 4: spare

Ordering details

Actuating magnet **BPS 33**
Spacer **BN 31/33**

The actuators for the magnetic safety sensors must be ordered separately.

ASU command devices

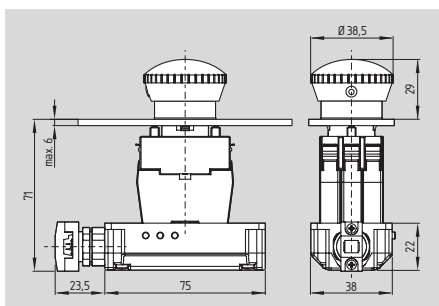

- Emergency-Stop button
- Compact embeddable command devices with ASU adapter box
- Integrated AS-Interface interface
- AS-Interface LED status display
- AS-Interface M12 connector, IDC connector
- Miscellaneous positioning parts (metal, plastic)
- Mounting hole 22.3 mm (to EN 50 007)
- Protection class IP 65 (from front)

Approvals



Ordering details

EFP①-AS② Contact block
③DRZ 40 RT Actuating element

No.	Replace	Description
①	ST	M12 connector
	DT	Flat cable connection (DC)
	ME	optional: 2 m cable, cable gland, flying lead
②	30	1 NC
	330	2 NC
③	E	Metal actuating element
	K	Plastic actuating element

Technical data

Standards: EN 50295
 EN 60947-5-1
 EN 954-1

Enclosure: glass-fibre reinforced polyamide nylon, self-extinguishing

AS-Interface connection type: (see ordering data)
 Protection class: IP 65 (front)
 IP 20 (rear of the front plate)

AS-Interface operating voltage: 26.5 ... 31.6 VDC, via AS-interface, reverse-polarity proof

AS-Interface operating current: ≤ 50 mA

AS-Interface specification:

Profile	S-7.B
IO-Code	0x7
ID-Code	0xB
ID-Code2	0xE

Inputs:

Contact	Status	Data bits
1	on	D0/D1 = dynamic code transmission
1	off	D0/D1 = static code "00"
2	on	D2/D3 = dynamic code transmission
2	off	D2/D3 = static code "00"

Parameter bits: P0 ... P3 not used
 Input module address: default on address 0, programmable via the AS-interface Master or Hand-held programming device

Indications: AS-interface: voltage LED green, communication LED red
 Enabling status: LED yellow

Resistance to shock: 110 g/4 ms...30 g/18 ms, no bouncing
 (for actuating heads with higher respectively lower weight)

Resistance to vibration: ≥ 20 g / 10 ...200 Hz
 (for actuating heads with higher respectively lower weight)

EMC rating: conforming to EMC Directive

Ambient temperature: - 25 °C ... + 60 °C

Storage and transport temperature: - 25 °C ... + 85 °C

Technical data

Actuating elements

Al-metal actuating element:

Resistance to shock: max. 15 g / 22 ms* (temporary data)
 Resistance to vibration: max. 0.35 mm, 0 ... 150 Hz

Plastic actuating element:


Resistance to shock: max. 15 g / 22 ms* (temporary data)
 Resistance to vibration: max. 0.35 mm, 0 ... 150 Hz

Note

Addressing through flat cable connection or through M12 connector.



M12 connector:
 1: AS-Interface +
 2: spare
 3: AS-Interface -
 4: spare



Flat cable connection:
 1: AS-i +
 2: AS-i -

Note


Mounting

One-hole fixation 22.3 mm + 0.4 mm to EN 50 007 (a tail cut-out as displacement protection is not required for Elan devices)

The positioning parts are not included in delivery.

AS-Interface Safety at Work

ASU command devices

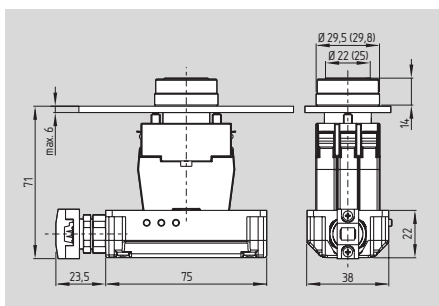

- Push button
- Compact embeddable command devices with ASU adapter box
- Integrated AS-Interface interface
- AS-Interface LED status display
- AS-Interface M12 connector, IDC connector
- Miscellaneous positioning parts (metal, plastic)
- Mounting hole 22.3 mm (to EN 50 007)
- Protection class IP 65 (from front)

Technical data

Standards: EN 50295
EN 60947-5-1
EN 954-1

Enclosure: glass-fibre reinforced polyamide
nylon, self-extinguishing

AS-Interface connection type: (see ordering data)
Protection class: IP 65 (front)
IP 20 (rear of the front plate)

AS-Interface operating voltage: 26.5 ... 31.6 VDC,
via AS-interface,
reverse-polarity proof

AS-Interface operating current: ≤ 50 mA

AS-Interface specification: Profile S-7.B
IO-Code 0x7
ID-Code 0xB
ID-Code2 0xE

Inputs: Contact Status Data bits
1 on D0/D1 = dynamic code transmission
1 off D0/D1 = static code "00"
2 on D2/D3 = dynamic code transmission
2 off D2/D3 = static code "00"

Parameter bits: P0 ... P3 not used
Input module address: default on address 0,
programmable via the AS-interface Master or
Hand-held programming device

Indications: AS-interface: voltage LED green,
communication LED red
Enabling status: LED yellow

Resistance to shock: 110 g/4 ms...30 g/18 ms,
no bouncing
(for actuating heads with higher respectively lower weight)

Resistance to vibration: ≥ 20 g / 10 ...200 Hz
(for actuating heads with higher respectively lower weight)

EMC rating: conforming to
EMC Directive

Ambient temperature: - 25 °C ... + 60 °C

Storage and transport temperature: - 25 °C ... + 85 °C

Approvals




Ordering details

EFP①-AS② Contact block
③ DT ④ Actuating element


No.	Replace	Description
①	ST DT ME	M12 connector Flat cable connection (DC) optional: 2 m cable, cable gland, flying lead
②	03 033	1 NO 2 NO
③	E K	Metal actuating element Plastic actuating element
④	GN* SW* BL*	Green push-button Black push-button Blue push-button Other colours on request

Note

Addressing through flat cable connection
or through M12 connector.



M12 connector:
1: AS-Interface +
2: spare
3: AS-Interface -
4: spare



Flat cable connection:
1: AS-i +
2: AS-i -

Note


Mounting

One-hole fixation 22.3 mm + 0.4 mm to
EN 50 007 (a tail cut-out as displacement
protection is not required for Elan devices)

The positioning parts are not included
in delivery.

* Push-buttons in different colours available
on request.

ASU command devices

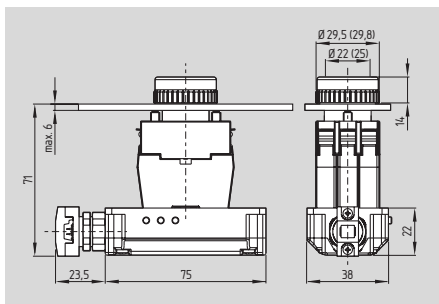

- Illuminated push-button
- Compact embeddable command devices with ASU adapter box
- Integrated AS-Interface interface
- AS-Interface LED status display
- AS-Interface M12 connector, IDC connector
- Miscellaneous positioning parts (metal, plastic)
- Mounting hole 22.3 mm (to EN 50 007)
- Protection class IP 65 (from front)

Approvals



Ordering details

EFP①-AS② Contact block
③DL④ Actuating element

No.	Replace	Description
①	ST DT ME	M12 connector Flat cable connection (DC) optional: 2 m cable, cable gland, flying lead
②	03L	1 NO
③	E K	Metal actuating element Plastic actuating element
④	GN* SW*	Green illuminated push-button Black illuminated push-button Other colours on request

Technical data

Standards: EN 50295
 EN 60947-5-1
 EN 954-1

Enclosure: glass-fibre reinforced polyamide
 nylon, self-extinguishing

AS-Interface
 connection type: (see ordering data)
 Protection class: IP 65 (front)
 IP 20 (rear of the front plate)

AS-Interface
 operating voltage: 26.5 ... 31.6 VDC,
 via AS-interface,
 reverse-polarity proof

AS-Interface operating current: ≤ 50 mA,
 with illuminated
 pushbutton ≤ 70 mA

AS-Interface
 specification : Profile S-7.B
 IO-Code 0x7
 ID-Code 0xB
 ID-Code2 0xE

Inputs:
 Contact Status Data bits
 1 on D0/D1 = dynamic code
 transmission
 1 off D0/D1 = static code "00"
 2 on D2/D3 = dynamic code
 transmission
 2 off D2/D3 = static code "00"

Outputs: A0 Indicator lamp
 A1 ... A3 not used
 Parameter bits: P0 ... P3 not used

Input module address: default on address 0,
 programmable via the
 AS-interface Master or
 Hand-held programming device

Indications: AS-interface: voltage LED green,
 communication LED red

Enabling status: LED yellow
 Resistance to shock: 110 g/4 ms...30 g/18 ms,
 no bouncing

(for actuating heads with
 higher respectively lower weight)

Resistance to vibration: ≥ 20 g / 10 ...200 Hz
 (for actuating heads with
 higher respectively lower weight)



EMC rating: conforming to
 EMC Directive

Ambient temperature: -25 °C ... $+60$ °C

Storage and transport temp.: -25 °C ... $+85$ °C

Note

Addressing through flat cable connection
 or through M12 connector.



M12 connector:

1: AS-Interface +
 2: spare
 3: AS-Interface -
 4: spare

Flat cable connection:

1: AS-i +
 2: AS-i -

Note

Mounting


One-hole fixation 22.3 mm + 0.4 mm to
 EN 50 007 (a tail cut-out as displacement
 protection is not required for Elan devices)

The positioning parts are not included
 in delivery.

* Push-buttons in different colours available
 on request.

AS-Interface Safety at Work

ASU position switches

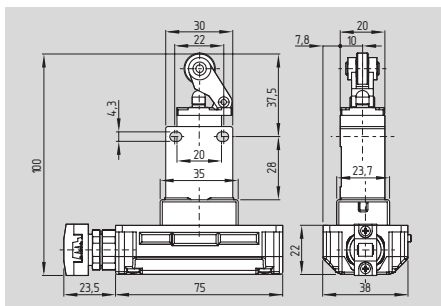

- Position switch with offset roller lever
- Compact position switches with ASU-adapter box
- Integrated AS-Interface interface
- AS-Interface LED status display
- AS-Interface M12 connector, IDC connector
- Mounting details to EN 50 047
- Positive break contacts
- Protection class IP 65 (from front)

Technical data

Standards: EN 50295
EN 60947-5-1
EN 954-1

Enclosure: glass-fibre reinforced polyamide
nylon, self-extinguishing

Design: fixings to EN 50047

AS-Interface connection type: (see ordering data)

Protection class: IP 65 (front)
IP 20 (rear of the front plate)

AS-Interface operating voltage: 26.5 ... 31.6 VDC,
via AS-interface,
reverse-polarity proof

AS-Interface operating current: ≤ 50 mA

AS-Interface specification :

Profile	S-7.B
IO-Code	0x7
ID-Code	0xB
ID-Code2	0xE

Inputs:

Contact	Status	Data bits
1	on	D0/D1 = dynamic code transmission
1	off	D0/D1 = static code "00"
2	on	D2/D3 = dynamic code transmission
2	off	D2/D3 = static code "00"

Input module address: default on address 0,
programmable via the AS-interface Master or
Hand-held programming device

Indications: AS-interface: voltage LED green,
communication LED red
Enabling status: LED yellow

Switching frequency: 3600/h

Resistance to shock: 30 g/18 ms, no bouncing
(for actuating heads with higher respectively lower weight)

Resistance to vibration: ≥ 15 g / 10 ... 200 Hz
(for actuating heads with higher respectively lower weight)


EMC rating: conforming to
EMC Directive

Ambient temperature: - 25 °C ... + 60 °C

Storage and transport temperature: - 25 °C ... + 85 °C

Contact variants

Switching angle



Approvals




Ordering details

SESR ① ②-AS③


No.	Replace	Description	
①	11	Metal roller	
	13	Plastic roller	
	②	ST	M12 connector
		DT	Flat cable connection (DC) optional: 2 m cable, cable gland, flying lead
ME			
③	110	2 NC	

Note

Addressing through flat cable connection or through M12 connector.



M12 connector:
1: AS-Interface +
2: spare
3: AS-Interface -
4: spare



Flat cable connection:
1: AS-i +
2: AS-i -

Note

General use

Actuating angle: max. 30°
Actuating direction of the actuating heads: 4 x 90° repositioned

Repeat accuracy of switching points

for plastic rollers: ± 0,2 mm
for metal rollers: ± 0,1 mm
at the plunger: ± 0,01 mm

Plastic roller

Actuating speed (normally): > 30m/min.


Metal roller

Actuating speed (temperatures > 50°C): max. 30 m/min

Mounting:

Recommended: cylindric screws M4 x 25
ISC 1207 (DIN 84),
spring washer A4 DIN 137

ASU position switches

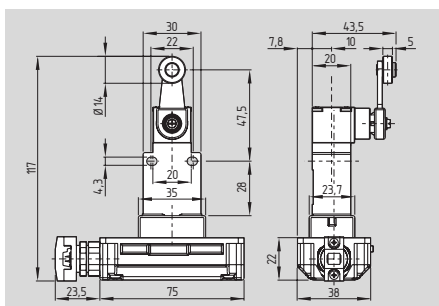

- Position switches with vertical roller lever
- Compact position switches with ASU-adapter box
- Integrated AS-Interface interface
- AS-Interface LED status display
- AS-Interface M12 connector, IDC connector
- Mounting details to EN 50 047
- Positive break contacts
- Protection class IP 65 (from front)

Technical data

Standards: EN 50295
EN 60947-5-1
EN 954-1

Enclosure: glass-fibre reinforced polyamide
nylon, self-extinguishing
Design: fixings to EN 50047

AS-Interface connection type: connector M12 x 1
Protection class: IP 65 (front)
IP 20 (rear of the front plate)

AS-Interface operating voltage: 26.5 ... 31.6 VDC,
via AS-interface,
reverse-polarity proof

AS-Interface operating current: ≤ 50 mA

AS-Interface specification : Profile S-7.B
IO-Code 0x7
ID-Code 0xB
ID-Code2 0xE

Inputs:
Contact Status Data bits
1 on D0/D1 = dynamic code transmission
1 off D0/D1 = static code "00"
2 on D2/D3 = dynamic code transmission
2 off D2/D3 = static code "00"

Input module address: default on address 0,
programmable via the
AS-interface Master or
Hand-held programming device

Indications: AS-interface: voltage LED green,
communication LED red
Enabling status: LED yellow

Switching frequency: 3600/h

Resistance to shock: 30 g/18 ms, no bouncing
(for actuating heads with
higher respectively lower weight)

Resistance to vibration: ≥ 15 g / 10 ... 200 Hz
(for actuating heads with
higher respectively lower weight)


EMC rating: conforming to
EMC Directive

Ambient temperature: - 25 °C ... + 60 °C

Storage and transport
temperature: - 25 °C ... + 85 °C

Contact variants

Switching angle



Approvals




Ordering details

SESH ① ②-AS③


No.	Replace	Description
①	15	Metal roller
	17	Plastic roller
	②	ST
②	DT	Flat cable connection (DC)
	ME	optional: 2 m cable, cable gland, flying lead
	③	110

Note

Addressing through flat cable connection
or through M12 connector.



M12 connector:
1: AS-Interface +
2: spare
3: AS-Interface -
4: spare



Flat cable connection:
1: AS-i +
2: AS-i -

Note

General use

Actuating angle: max. 30°

Actuating direction of
the actuating heads: 4 x 90° repositioned

Repeat accuracy of switching points

for plastic rollers: ± 0,2 mm

for metal rollers: ± 0,1 mm

at the plunger: ± 0,01 mm

Plastic roller

Actuating speed (normally): > 30m/min.

Metal roller


Actuating speed
(temperatures > 50°C): max. 30 m/min

Mounting:

Recommended: cylindric screws M4 x 25
ISC 1207 (DIN 84),
spring washer A4 DIN 137

AS-Interface Safety at Work

ASU position switches

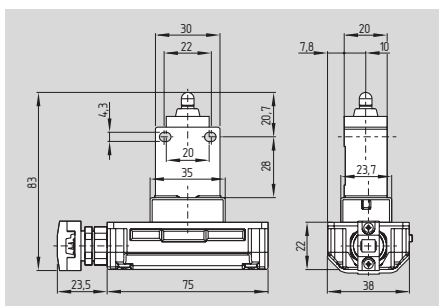

- Position switches with vertical plunger
- Compact position switches with ASU-adapter box
- Integrated AS-Interface interface
- AS-Interface LED status display
- AS-Interface M12 connector, IDC connector
- Mounting details to EN 50 047
- Positive break contacts
- Protection class IP 65 (from front)

Technical data

Standards: EN 50295
EN 60947-5-1
EN 954-1

Enclosure: glass-fibre reinforced polyamide
nylon, self-extinguishing
Design: fixings to EN 50047

AS-Interface connection type: connector M12 x 1
Protection class: IP 65 (front)
IP 20 (rear of the front plate)

AS-Interface operating voltage: 26.5 ... 31.6 VDC,
via AS-interface,
reverse-polarity proof

AS-Interface operating current: ≤ 50 mA
AS-Interface specification : Profile S-7.B
IO-Code 0x7
ID-Code 0xB
ID-Code2 0xE

Inputs:
Contact Status Data bits
1 on D0/D1 = dynamic code transmission
1 off D0/D1 = static code "00"
2 on D2/D3 = dynamic code transmission
2 off D2/D3 = static code "00"


Input module address: default on address 0,
programmable via the AS-interface Master or
Hand-held programming device
Indications: AS-interface: voltage LED green,
communication LED red
Enabling status: LED yellow

Switching frequency: 3600/h
Resistance to shock: 30 g/18 ms, no bouncing
(for actuating heads with higher respectively lower weight)
Resistance to vibration: ≥ 15 g / 10 ... 200 Hz
(for actuating heads with higher respectively lower weight)

EMC rating: conforming to EMC Directive
Ambient temperature: - 25 °C ... + 60 °C
Storage and transport temperature: - 25 °C ... + 85 °C

Contact variants

Switching angle



Approvals



Ordering details

SES ① -AS②


No.	Replace	Description
①	ST DT ME	M12 connector Flat cable connection (DC) optional: 2 m cable, cable gland, flying lead
②	110	2 NC

Note

Addressing through flat cable connection or through M12 connector.



M12 connector:
1: AS-Interface +
2: spare
3: AS-Interface -
4: spare



Flat cable connection:
1: AS-i +
2: AS-i -

Note

General use

Actuating angle: max. 30°
Actuating direction of the actuating heads: 4 x 90° repositioned

Repeat accuracy of switching points

for plastic rollers: ± 0,2 mm
for metal rollers: ± 0,1 mm
at the plunger: ± 0,01 mm

Plastic roller

Actuating speed (normally): > 30m/min.


Metal roller

Actuating speed (temperatures > 50°C): max. 30 m/min

Mounting:

Recommended: cylindric screws M4 x 25
ISC 1207 (DIN 84),
spring washer A4 DIN 137

ASU position switches

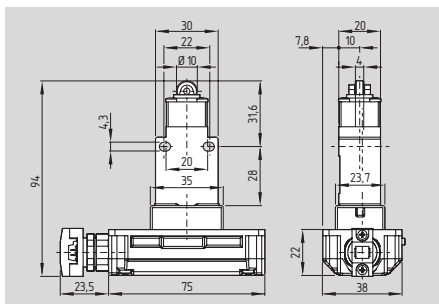

- Position switches with vertical roller plunger
- Compact position switches with ASU-adapter box
- Integrated AS-Interface interface
- AS-Interface LED status display
- AS-Interface M12 connector, IDC connector
- Mounting details to EN 50 047
- Positive break contacts
- Protection class IP 65 (from front)

Technical data

Standards: EN 50295
EN 60947-5-1
EN 954-1

Enclosure: glass-fibre reinforced polyamide
nylon, self-extinguishing
Design: fixings to EN 50047

AS-Interface connection type: connector M12 x 1
Protection class: IP 65 (front)
IP 20 (rear of the front plate)

AS-Interface operating voltage: 26.5 ... 31.6 VDC,
via AS-interface,
reverse-polarity proof

AS-Interface operating current: ≤ 50 mA

AS-Interface specification : Profile S-7.B
IO-Code 0x7
ID-Code 0xB
ID-Code2 0xE

Inputs:
Contact Status Data bits
1 on D0/D1 = dynamic code transmission
1 off D0/D1 = static code "00"
2 on D2/D3 = dynamic code transmission
2 off D2/D3 = static code "00"

Input module address: default on address 0,
programmable via the
AS-interface Master or
Hand-held programming device

Indications: AS-interface: voltage LED green,
communication LED red
Enabling status: LED yellow

Switching frequency: 3600/h

Resistance to shock: 30 g/18 ms, no bouncing
(for actuating heads with
higher respectively lower weight)

Resistance to vibration: ≥ 15 g / 10 ... 200 Hz
(for actuating heads with
higher respectively lower weight)


EMC rating: conforming to
EMC Directive

Ambient temperature: - 25 °C ... + 60 °C

Storage and transport
temperature: - 25 °C ... + 85 °C

Contact variants

Switching angle



Approvals




Ordering details

SESB ① ②-AS③


No.	Replace	Description
①	31	Metal roller
	33	Plastic roller
②	ST	M12 connector
	DT	Flat cable connection (DC)
	ME	optional: 2 m cable, cable gland, flying lead
③	110	2 NC

Note

Addressing through flat cable connection
or through M12 connector.



M12 connector:
1: AS-Interface +
2: spare
3: AS-Interface -
4: spare



Flat cable connection:
1: AS-i +
2: AS-i -

Note

General use

Actuating angle: max. 30°

Actuating direction of
the actuating heads: 4 x 90° repositioned

Repeat accuracy of switching points

for plastic rollers: ± 0,2 mm

for metal rollers: ± 0,1 mm

at the plunger: ± 0,01 mm

Plastic roller

Actuating speed (normally): > 30m/min.

Metal roller


Actuating speed
(temperatures > 50°C): max. 30 m/min

Mounting:

Recommended: cylindric screws M4 x 25
ISC 1207 (DIN 84),
spring washer A4 DIN 137

AS-Interface Safety at Work

TG...-A

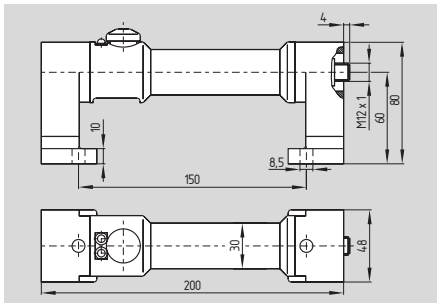

- Door handle switch
- Integrated AS-Interface interface
- AS-Interface LED status display
- AS-Interface M12 connector
- Enabling button
- Coloured signal LEDs (optional)
- Protection class IP 65

Technical data

Standards: EN 50295
EN 60947-5-1
EN 954-1

Enclosure: PA + POM

AS-Interface connection type: connector M12 x 1

Protection class: IP 65

AS-Interface operating voltage: 26.5 ... 31.6 VDC,
via AS-interface,
reverse-polarity proof

AS-Interface operating current: ≤ 50 mA

AS-Interface specification :

Profile S-B.A
IO-Code 0xB
ID-Code 0xA
ID-Code2 0xE

Outputs: Data bits Function
D0 LED 1 (G)
D1 LED 2 (R)

Inputs: Data bits Function
D2 NO contact 1
D3 NO contact 2
(optional)

Input module address: default on address 0,
programmable via the
AS-interface Master or
Hand-held programming device

Indications: AS-interface: voltage LED green
communication LED red

EMC rating: conforming to
EMC Directive

Ambient temperature: - 20 °C ... + 60 °C

Storage and transport temperature: - 25 °C ... + 85 °C

Approvals



Ordering details

TG-S GR xx-A

Further devices on request.

Note

A separate address jack is not available as an option. The addressing must take place via the cable end or the M12 connector.




M12 connector:

- 1: AS-Interface +
- 2: spare
- 3: AS-Interface -
- 4: spare

AS-Interface Safety at Work

ASF 2 CC

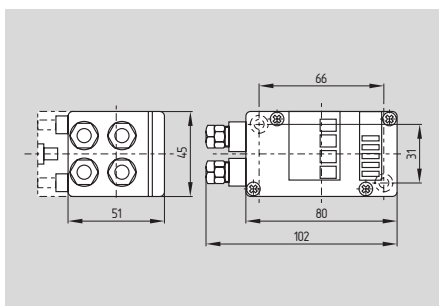

- Input module
- 2 safe inputs for mechanical contacts
- Cross-wire monitoring
- Cage clamp terminals for safety device connection
- LED function display
- IDC technology for AS-Interface flat cable
- Protection class IP 67

Technical data

Standards:	EN 50295, EN 954-1		
Enclosure:	black		
AS-Interface connection type:	IDC to the flat cable AS-interface		
Cage clamp terminals:	max. 2,5 mm ² (incl. conductor ferrules)		
AS-Interface operating voltage:	26.5 ... 31.6 VDC, via AS-interface, reverse-polarity proof		
Protection class:	IP 67		
AS-Interface operating current:	< 70 mA		
Inputs:	2 safe inputs for mechanical contacts, monitored for cross-wired circuit, cable length < 30 m		
Input signal:	„S+1, S+2“: I _e < 10 mA, pulsed		
AS-Interface specification:	Profile:	S-0.B	
	IO-Code:	0x0	
	ID-Code:	0xB	
	ID-Code2:	0xE	
Inputs:	Switch	Status	Data bits
	1	on	D0/D1 = dynamic code transmission
	1	off	D0/D1 = static code "00"
	2	on	D2/D3 = dynamic code transmission
	2	off	D2/D3 = static code "00"
Parameter bits:	P0	not used	
	P1	not used	
	P2	not used	
	P3	not used	
Input module address:	default on address 0, programmable via the AS-interface Master or Hand-held programming device		
Indications:	AS-interface:	voltage LED green communication LED red	
	Switching condition:	LED yellow	
EMC rating:	conforming to EMC Directive		
Ambient temperature:	- 25 °C ... + 60 °C		
Storage and transport temperature:	- 25 °C ... + 85 °C		

Approvals



Ordering details

ASF 2 CC

Note

The safe AS-Interface input module offers two universal safety relevant inputs for mechanical contacts. The safe switches are connected to cage-clamp terminals inside the module housing. The signal voltage is supplied by the module itself.


The two safe input channels are cross-wire monitored
The base module is the electro-mechanical link between the AS-Interface flat cable and the user module (i.e. ASF 2CC).

AS-Interface Safety at Work

Note

- The wiring diagram is shown with guard doors closed and in de-energised condition.


Wiring diagram

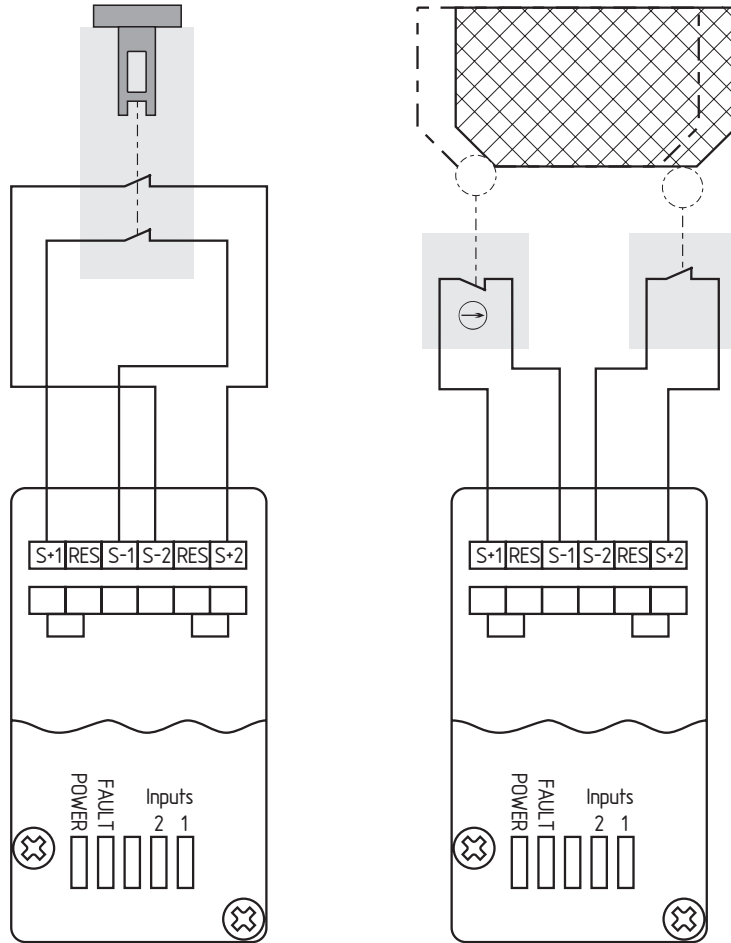

- Please note that for the correct use of the input module there must be two jumpers present (1+2 and 5+6, see electrical connection).
- Monitoring a sliding guard door using two position switches with safety function. The NC contact must have positive break when the guard door is opened.

AS-Interface Safety at Work

ASF KM1

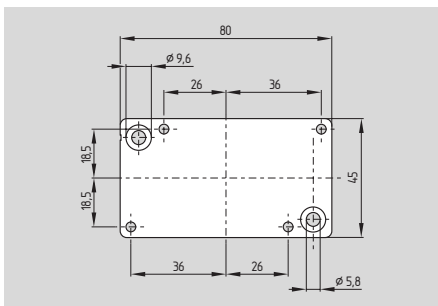

- Base module
- Base module without address jack
- AS-Interface interface for user module
- Connection of AS-Interface flat cable
- Top hat section rail or screw mounting

Technical data

Standards:	EN 50295
U_e :	26,5 ... 31,6 V (according to AS-inter- face specification)
I_e :	max. 2 A
AS-Interface specification:	EMS
AS-Interface connection type:	2 flat cables AS-interface (IDC)
Protection class:	IP 67 to EN60529 (only in combination with ASF 2 CC)
Ambient temperature:	- 25 °C ... + 60 °C
Storage and transport temperature:	- 25 °C ... + 85 °C
Special features:	2 parallel cable channels for various T- and Cross-junctions
Mounting:	top hat section rail or screw mounting

Approvals




Ordering details

ASF KM 1

Note


The base module is the electro-mechanical link between the AS-Interface flat cable and the user module (i.e. ASF 2CC).

Note

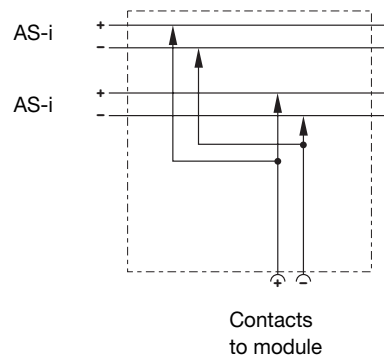

AS-Interface Safety at Work

ASF PM

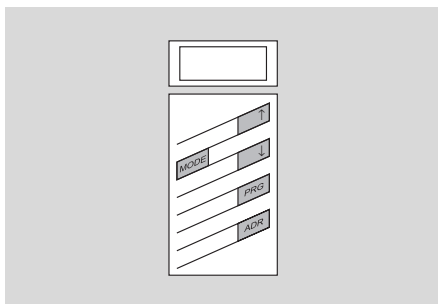

- Hand-held programming device
- Addressing and Programming up to a maximum of 62 Slaves (A/B-Slaves)
- Read/write operation of slave data
- Displaying the IO-code
- Read/write operation of parameter data
- Displaying the address mode / ID-code
- Displaying the peripheral fault flags
- Determining the slave address
- Re-addressing with checking
- Slave connection is short-circuit and overload proof
- Mech. connection with the help of the universal adapter
- Battery charger included with delivery

Technical data

Interface:	AS-interface, short-circuit- and overload-proof
Operating device:	230 VAC, plug-in charging unit, included in the delivery package
Operating duration:	8 h or > 250 read/write cycles with fully charged batteries
Power supply:	battery mode, charging time before use about 14 h
Display:	LC-display
Keyboard:	5 keys, membrane keys
Protection class:	IP 20
Ambient temperature:	0 °C ... + 55 °C
Storage and transport temperature:	- 20 °C ... + 55 °C
Dimensions:	80 x 34 x 214 mm

Note

The LCD displays the address, the operating mode or an error code. The AS-Interface hand held programming device will be switched on by pressing the button "ADR". It shuts down independently after about one minute when not in use.

- Pressing the "ADR" button causes the current slave address to be displayed
- The two keys "↑" and "↓" can be used to select the programmable address from the address ring (i.e. 0 ...31, 0 ...31A, 0 ...31B)
- A short key stroke causes the page to turn stepwise, whereas holding down the key causes the pages to scroll continuously (0.5s per address)
- Pressing the "PRG"-key causes the new address to be loaded into the slave
- The correct programmed address is automatically displayed after about 0.5s
- Holding down "ADR" and "PRG" simultaneously will automatically set back the slave address to zero
- Other key combinations do not trigger any further action

Approvals



Ordering details

ASF PM

Note

The LCD displays the address, the operating mode or an error code.

„ ↑ “ button	= increments slave address
„MODE“ button	= changes the working mode
„ ↓ “ button	= decrements slave address
„PRG“ button	= programming of the new slave address
„ADR“ button	= reading a slave address / switches on the device

Error messages

- F1: AS-Interface overload
- F2: Slave not found
- F3: Programming error
- F4: Destination address busy
- F5: Zero address already occupied
- F6: Standard slave found instead of an extended slave
- F7: Extended slave found instead of a standard slave
- F8: Reception error

LOBAT = Recharge batteries !

After the first indication approx. 30 read/write operation are still possible. Load the accumulator only with the charger included within this delivery.